


WENZHOU KAI XU AUTOMOBILE FITTING CO., LTD


DIN984(KX-KKK 16-170)(spring K-ring for bore 孔用K型弹性挡圈)

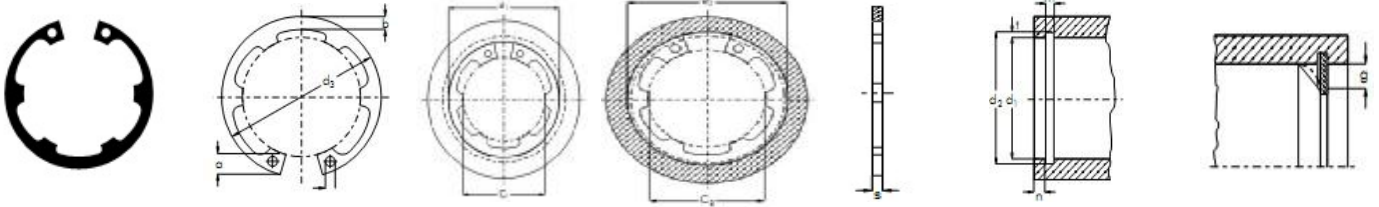

公称直径 d ₁	外径 d ₃		厚度 S		槽直径 d ₂		槽宽 m min	孔径 d ₅ min	头宽 a max	尾宽 b ≈	重量 Kg/1000 ≈
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差					
16	17.30	+0.42 -0.13	1.00		16.80	+0.11	1.10	1.70	3.40	2.10	0.72
17	18.30				17.80				0.80		
18	19.50				2.30	1.06					
19	20.50							20.00	0.99		
20	21.50				2.40	1.06					
21	22.50							21.00	1.17		
22	23.50				2.60	1.28					
23	24.60							22.00	1.28		
24	25.90				2.80	1.48					
25	26.90							23.00	1.48		
26	28.50	+0.42 -0.21	1.20	-0.06	24.10	+0.21	1.30	2.00	4.10	2.60	1.48
27	29.10				25.20				1.60		
28	30.10	+0.50 -0.25	1.50	-0.06	26.20	+0.25	1.60	2.50	4.20	2.80	1.72
30	32.10				27.20				2.00		
31	33.40	+0.90 -0.39	1.75	-0.07	28.40	+0.30	1.85	2.50	4.40	2.90	2.00
32	34.40				29.40				2.10		
33	35.50	+1.10 -0.46	2.00	-0.07	31.40	+0.30	2.15	8.20	4.50	3.00	2.10
34	36.50				32.70				2.35		
35	37.80	+1.10 -0.46	2.00	-0.07	33.70	+0.30	2.15	8.20	3.20	3.20	2.35
36	38.80				34.70				2.42		
38	40.80	+1.10 -0.46	2.00	-0.07	35.70	+0.30	2.15	8.20	5.00	3.30	2.50
40	43.50				37.00				2.65		
42	45.50	+1.10 -0.46	2.00	-0.07	38.00	+0.30	2.15	8.20	5.10	3.40	2.80
44	47.50				40.00				3.80		
45	48.50	+1.10 -0.46	2.00	-0.07	42.50	+0.30	2.15	8.20	5.30	3.60	4.00
47	50.50				44.50				4.15		
48	51.50	+1.10 -0.46	2.00	-0.07	46.50	+0.30	2.15	8.20	5.50	3.80	4.40
50	54.20				47.50				4.40		
52	56.20	+1.10 -0.46	2.00	-0.07	49.50	+0.30	2.15	8.20	5.60	4.00	5.30
55	59.20				50.50				4.50		
57	61.20	+1.10 -0.46	2.00	-0.07	53.00	+0.30	2.15	8.20	6.10	4.20	6.00
58	62.20				55.00				4.70		
60	64.20	+1.10 -0.46	2.00	-0.07	58.00	+0.30	2.15	8.20	4.70	4.30	6.60
62	66.20				60.00				6.90		
65	69.20	+1.10 -0.46	2.50	-0.07	61.00	+0.30	2.65	3.00	4.50	4.50	7.50
					63.00				8.50		
		65.00	9.40								
		68.00	9.75								
			11.65								
			12.00								
			12.70								
			12.75								
			16.70								

WENZHOU KAIXU AUTOMOBILE FITTING CO., LTD

DIN984(KX-KKK 16-170)(spring K-ring for bore 孔用K型弹性挡圈)

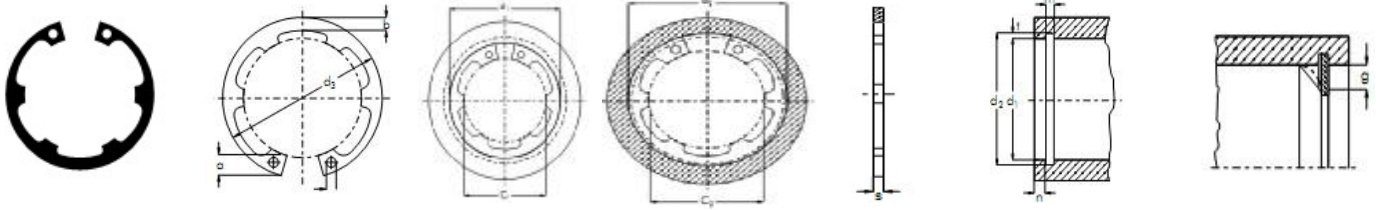

公称直径 d ₁	外径 d ₃		厚度 S		槽直径 d ₂		槽宽 m min	孔径 d ₅ min	头宽 a max	尾宽 b ≈	重量 Kg/1000 ≈	
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差						
67	71.50	+1.10 -0.46	2.50	-0.07	70.00	+0.30	2.65	3.00	10.20	6.00	18.60	
68	72.50				71.00							19.30
70	74.50				73.00							20.20
72	76.50				75.00							21.20
75	79.50				78.00							22.60
80	85.50	+1.30 -0.54	3.00	-0.08	83.50	+0.35	3.15	3.50	12.20	7.00	25.00	
85	90.50				88.50							30.10
90	95.50				93.50							35.50
95	100.50				98.50							40.00
100	105.50				103.50							43.50
110	117.00	+1.50 -0.63	4.00	-0.10	114.00	+0.54	4.15	4.00	14.20	9.00	73.00	
115	122.00				119.00							82.00
120	127.00				124.00							87.00
125	132.00				129.00							92.00
130	137.00				134.00							102.00
140	148.00	+0.63			144.00					#####	112.00	
150	158.00				155.00							123.00
170	169.00				165.00							133.00
160	179.50				175.00							145.00